

Section

DO NOT SCALE

Notes

This detail should be used where the requirement is to waterproof a lift pit and prevent water from below the Newton System 500 floor membrane from entering the pit from above.


Newton 107F is a highly flexible cement based waterproofing slurry. Apply to all surfaces of the lift pit and across 100mm of the slab.

The membrane should be reinforced at the change in direction from horizontal to vertical with Newton 912-RT as recommended within the product data sheet.

To access the details mentioned above, relevant NBS Clauses, product data and MSDS sheets, please visit Technical resources via www.newtonwaterproofing.co.uk

Newton System 100

Lift pit bund - Type A - 107F - 912-RT

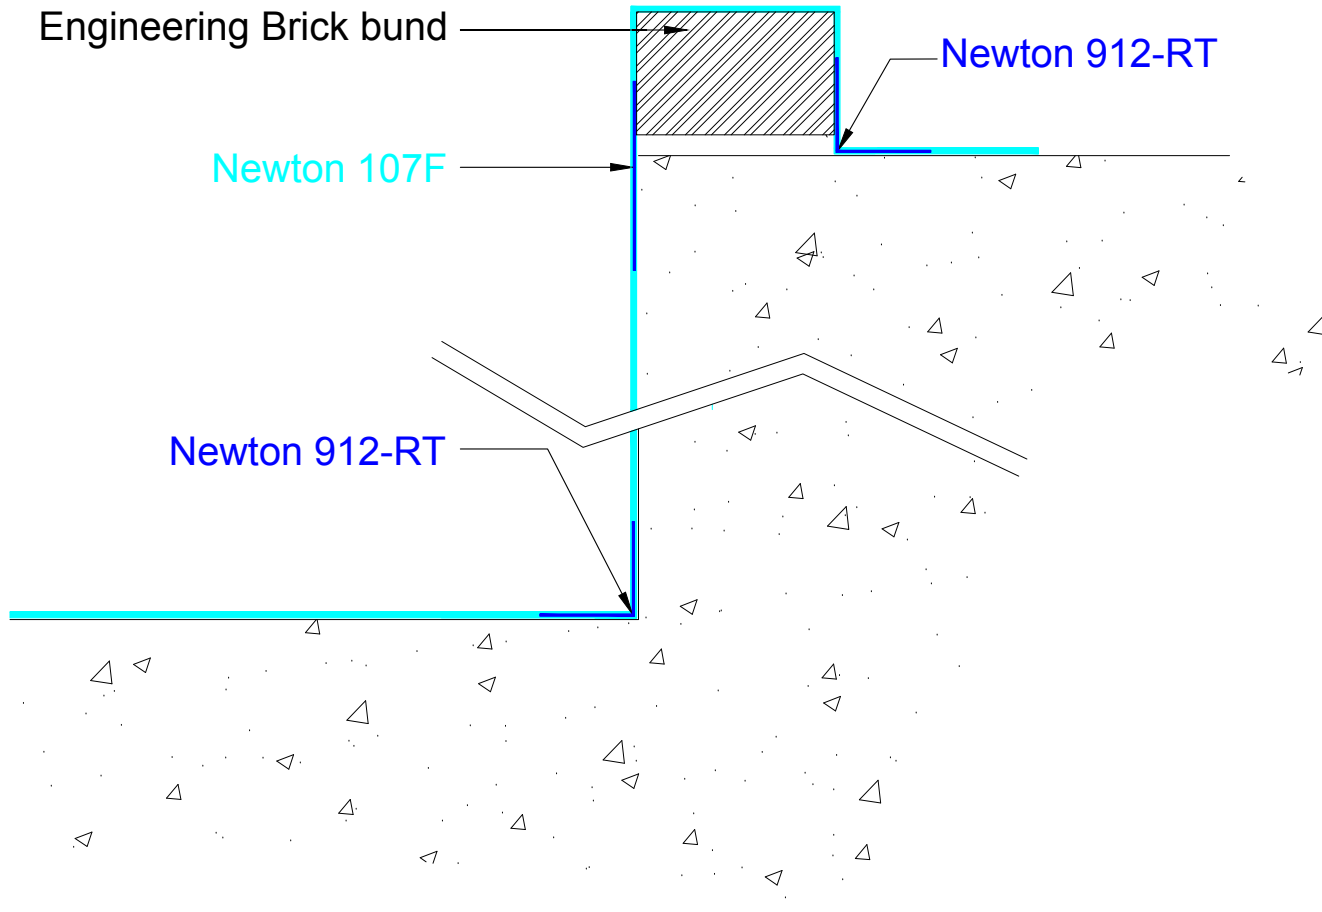

NOTE: This is a waterproofing detail. For the design of the structure, please use a professional designer. We strongly recommend that Newton waterproofing systems are installed by our NSBC registered contractors who will guarantee, insure and accept liability for both the design and the installation of our systems. Please refer to product data sheets before installation of our products. Newton Waterproofing Systems reserves the right to update drawings.